




SERIES BV 4500

TECHICAL INFORMATION

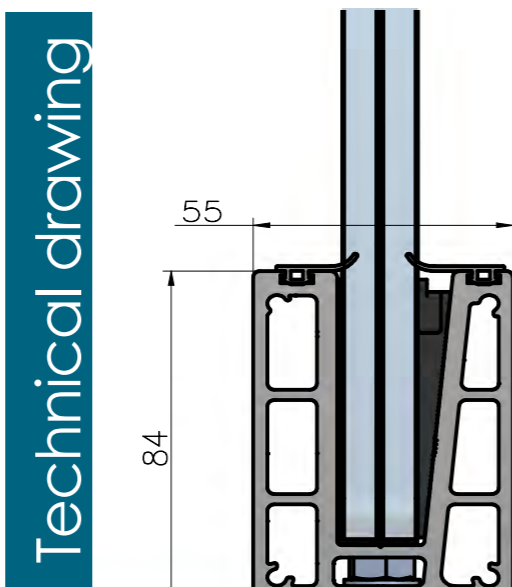

To produce the BV4500 we use the highest quality series of aluminum EN AW 6063, its well known for its extreme strength and elastic resistance designed to work with 12.76-17.52mm glass.



WEDGE AND PLASTIC INSERT

K4500-16 (16mm)
K4500-12 (12mm)




BEGINING AND END COVER


BV 4500K

INSTALL GUIDE

BASE MOUNT - BV 4500

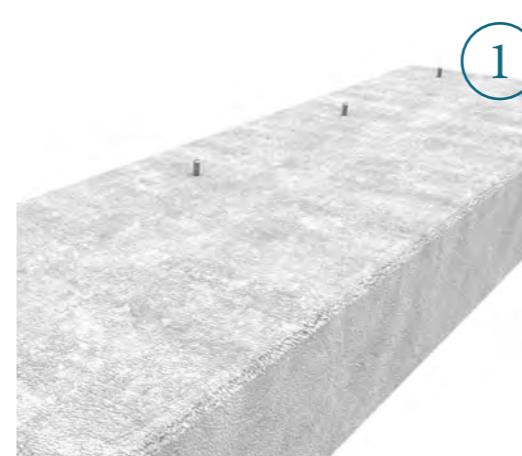

1. Drill, vacuum, insert glue and chemical anchor.

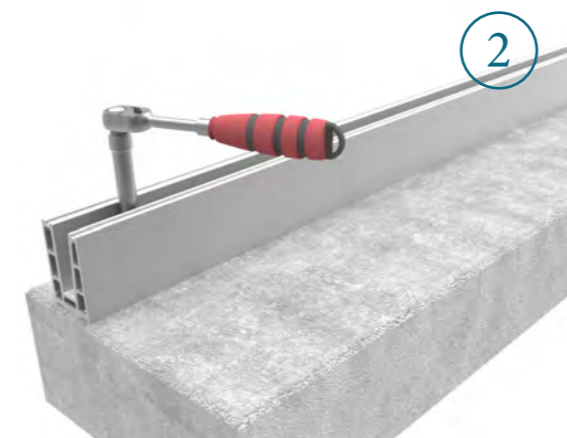

2. Place profile and secure to floor using OMO screws.




3. Place pastic inserts, out facing rubber gasket and glass.



4. Place wedges and secure like shown in the bigger picture.



6. Finished look.

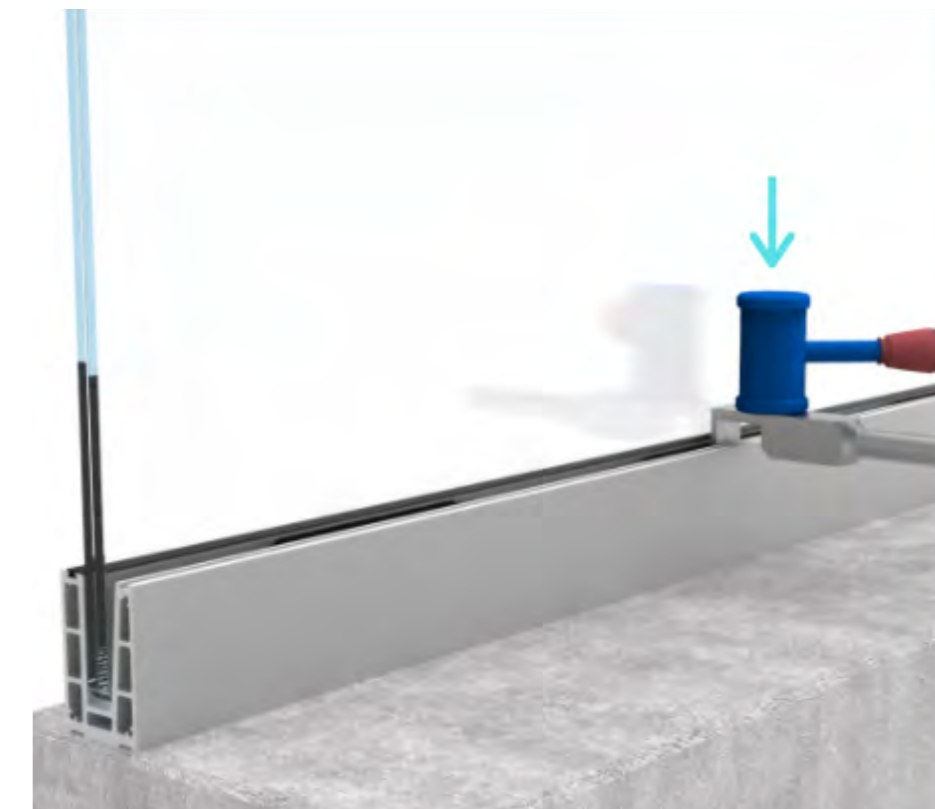

Once all wedges are in place, use wedge inserter and a hammer to insert them until the glass is locked.